

olix



- 24h*7
- 178
- VESA
- Speaker icon
- 3840P
HDMI / VGA / BNC
- 5ms
- 4K

- .
- .
- .
- .
- .
- .
- .
- .
- .
- .



-
- 3
- 8



DISPLAY CHARACTERISTICS

Mode Name	OM28-4K
Screen Size	28"
Active Display Area (mm)	648.9mm(W)× 369.3mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	3840 × 2160
Display Color	1.073G
Pixel Pitch(mm)	0.248(H)×0.248(V)
Brightness(nits)	350cd/m ²
Contrast Ratio	3000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

DVI	1
VGA	1
DP	1
HDMI 2.0	1
Speaker	2x3W(Stereo)

VIDEO


Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Video Noise Reduction	YES

POWER&Mount Way


Power	AC100V~240V,50/60Hz
Working Temperature	-30 to +85 °C
Power Consumption	≅80W
Menu	Chinese/English(other languages supported)
Mounting	Stand mount, VESA mount
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	---

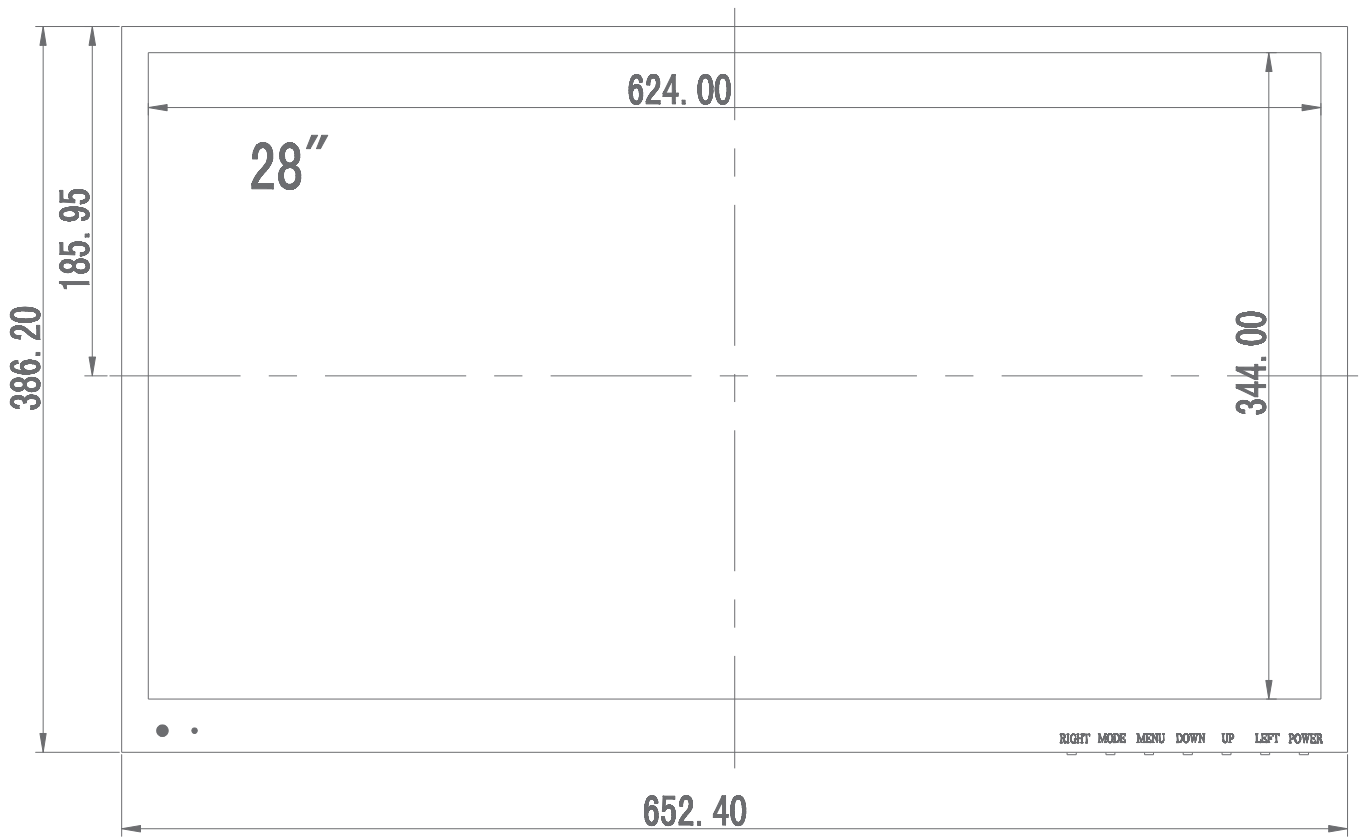

Unit:mm

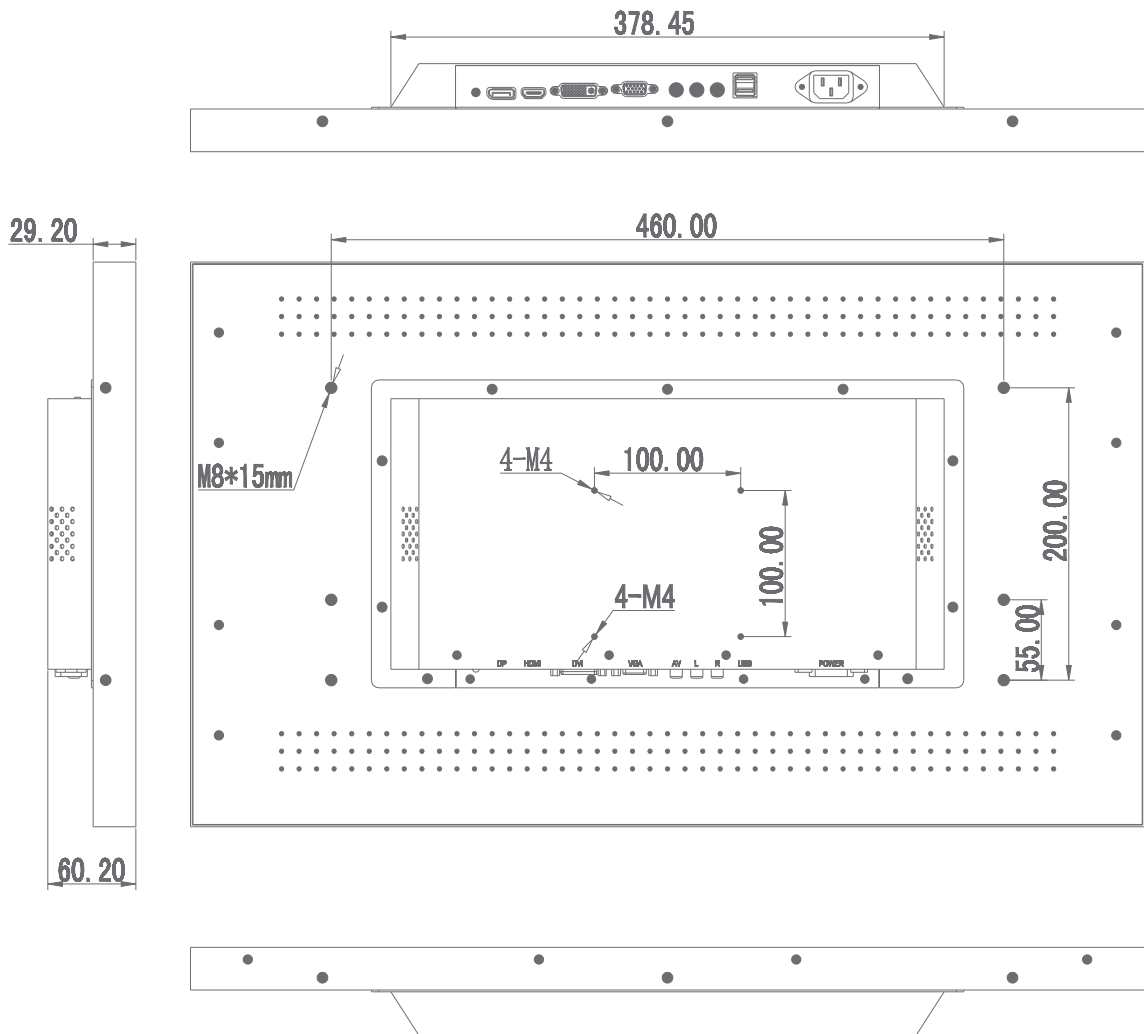

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.